

Avex® 1661


For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



| English | Français | Deutsch | Italiano | Español |
|--------------------------------------|--|---------------------------------|--|-------------------------------------|
| Dome head | Tête plate | Flachrundkopf | Testa tonda | Cabeza alomada |
| Body: Aluminium alloy* (2.5 % Mg) | Corps: Alliage d'aluminium* (2.5% Mg) | Hülse: Aluminium* (2.5 % Mg) | Corpo: Lega di alluminio* (2.5% Mg) | Cuerpo: Aluminio* (2.5% Mg) |
| Natural | Brut | Blank | Nessuna finitura | Natural |
| Stem: Low carbon steel** | Tige: Acier bas carbone** | Dorn: Stahl** | Gambo: Acciaio a basso tenore di carbonio** | Vástago: Acero bajo en carbono** |
| Zinc coated | Revêtement zingué | Verzinkt | Zincato | Zincado |

*: AA 5052, DIN 1725, AlMg2.5, Werkstoff 3.3523

** : BS3111 Type 0, SAE 1015/1018/1022, DIN 1654, Cq15/Cq22

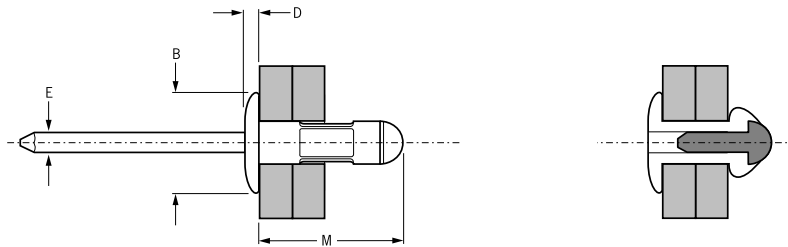

| Ø | [Cross-section] | | [Thread] | | M | B | D | E | [Torque] | [Torque] | Part No/ref |
|----------------|-----------------|------|----------|------|------|------|-----|-----|----------|----------|---------------------------|
| | min. | max. | min. | max. | | | | | | | |
| 3.0 | 0.8 | 4.3 | 3.1 | 3.3 | 9.1 | 6.7 | 1.3 | 1.7 | 0.7 | 0.9 | 01661-05307 |
| 3.2 (1/8") | 0.8 | 4.8 | 3.3 | 3.4 | 10.4 | 6.7 | 1.3 | 1.8 | 0.7 | 1.0 | 01661-00410 |
| | 1.2 | 6.3 | | | 12.0 | | | | | | 01661-00412 |
| | 4.0 | 7.9 | | | 13.6 | | | | | | 01661-00414 |
| | 5.5 | 9.5 | | | 16.0 | | | | | | 01661-00416 |
| 4.0 (5/32") | 0.5 | 3.2 | 4.1 | 4.2 | 9.3 | 8.2 | 1.6 | 2.2 | 1.1 | 1.6 | 01661-00508 |
| | 0.8 | 4.7 | | | 10.7 | | | | | | 01661-00510 |
| | 1.2 | 6.3 | | | 12.5 | | | | | | 01661-00512 |
| | 4.0 | 9.5 | | | 16.2 | | | | | | 01661-00516 |
| | 6.4 | 12.7 | | | 19.6 | | | | | | 01661-00521 |
| 4.8 (3/16") | 1.6 | 6.3 | 4.9 | 5.0 | 13.9 | 10.1 | 1.8 | 2.9 | 1.5 | 2.3 | 01661-00613 |
| | 4.8 | 11.1 | | | 18.7 | | | | | | 01661-00619 |
| | 4.8 | 12.7 | | | 20.2 | | | | | | 01661-00621 |
| | 12.7 | 19.8 | | | 28.2 | | | | | | 01661-00631 |
| 6.4 (1/4") | 1.5 | 8.3 | 6.6 | 6.9 | 16.8 | 13.5 | 2.7 | 4.0 | 3.1 | 2.5 | 01610-04506 ²⁾ |

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

2) stem: zinc plated, clear trivalent passivated / tige: revêtement zingué, passivation claire trivalente / Dorn: verzinkt, klar chromatiert Cr6-frei / gambo: zincato, passivazione chiara trivalente / vástago: zincado, pasivado claro trivalente